

- Standard Capacity: 1.500 LT/H (400 GAL/H)
- Standard Pressure: 200 BAR (3.200 PSI)
- Standard Power: 11 kW



HIGH-PRESSURE HOMOGENIZER
H.P. PISTON PUMP

Advantages

- High capacity at low RPM, saving energy
- Efficient homogenization
- Low maintenance costs
- Easy access for maintenance
- Hygienic and ergonomic desing
- Immediate spate parts availability
- Competitive pricing and on time delivers
- Pro-active competent customer service and support
- Suitable for abrasive and high viscosity products

Options

- 2nd stage homogenizing head
- Plungers in ceramic
- Automation and remote control
- Digital pressure gauge
- Variable frequency drive (VFD)
- Inlet pressure gauge
- Aseptic and sanitary version
- ATEX Compliance
- cGMP support and certification

INNOVATIVE
MANUFACTURING
Brand

APPLICATION

Dairy



Milk, UHT Milk,
Soy Milk, Oat Milk
Yoghurt, Ayrar
Kefir
Ice Cream
Gelato

Labneh, Kashta
Cream Cheese
Mascarpone
Desserts
Milk Powder
Spray Dried Products

Food & Beverage



Fruit Juices
Fruit Concentrate
Aromas / Cloudifiers
Food Emulsions
Ketchup / Tomato Paste
Margarine

Tahina
Hummus
Caramel Sauce
Topping Sauce
Dressing
Peanut / Hazelnut Paste

Chemicals and Petrochemical



Greas
Lubricants
Paraffin Emulsions
Silicone Emulsions
Wax Emulsions
Mineral oil Emulsions

Polymer Suspensions
Fungicides, Herbicides
Latex
Paint
Detergents

Cosmetics



Hair Products
Beauty Creams
Moisturizing Creams
Lotion
Shampoos
Half Conditioners

Nail Polishes
Lipsticks
Toothpaste
Collagen
Perfume
Waxes

Pharmaceuticals



Antibiotics
Creams
Antacids
Tablet Coatings
Liposomes
Ointments

Syrups
Vitamins
Proteins
Gels
Vaccines


Biotechnology



Proteins
Yeast
Vitamins
Bacteria
Enzymes
Liposomes

Viruses
Moss
Probiotics
Microorganisms
Algae
Celluloses

Dimensions

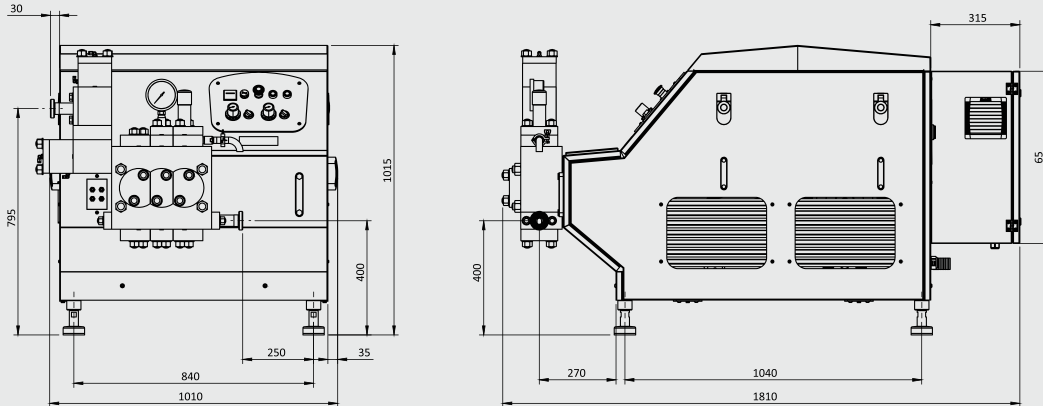

LENGTH mm/in	WIDTH mm/in	HEIGHT mm/in	NET WEIGHT kg/lbs	GROSS WEIGHT kg/lbs	INLET / OUTLET
1810 71	1010 40	1015 40	800 1764	1100 2425	DN40 DN50

Measure in mm/in

Compression Head

- Moonblock head formed by single forged block in high quality SS alloy
- 3-D CAD design, engineered using, FEM and CFD Analysis
- INNNOTION function integrating technical R&D and technology focus.
- Surface Roughness: Ra<1.6µm, Ra<0.8µm, Ra<0.5µm (electropolished)
- Designed to avoid sharp edges and stress concentration
- Overpressure relief valve installed
- 10-year warranty against cracks and defects

Homogenizing Valve

- Designed to be energy efficient with high stability
- Homogenization pressure pneumatic regulating system
- Tungsten carbide, cobalt carbide, Zirconium ceramic and silicon nitride, solid ceramic available as option

Pump Valves

- Mushroom and ball type in high wear resistant SS alloy
- Stellite and tungsten carbide materials available as option
- Designed symmetrically to be used twice-once on each time

Pump Body (Gearbox)

- High resistant resin reinforced cast iron
- Heavy duty engineered and vibrationless
- AC motor drive through V belts and pulleys with integrated gearbox

Frame

- Thick stainless-steel material is used for heavy load

Plungers

- Chrome coated stainless-steel alloy
- Ceramic, HCR chromium and tungsten carbide coated as option
- Solid ceramic as option

Sealing Components

- Long Lasting Food-grade hygienic material
- EPDM, NBR, FKM, PE, PTFE, ZEDEX, PEEK, TIVAR, Kevlar
- Available with FDA approval

Technical Data


Motor Power	11 kW
Number of Plungers	3
Lubrication Oil ISO VG 150	16 L
Gear Reducer Oil ISO VG 320	3 L
Water Consumption	60 L

Performance

Max.Capacity		Max. Pressure	
LT/H	GAL/H	BAR	PSI
2000	530	180	2600
1500	400	220	2900
1000	260	300	4400
750	200	400	5800
500	130	500	7250
300	80	800	11600
200	50	1200	17500
150	40	1500	22000

*Special desing & manufacturing are made for different pressures & capacities.

The information contained in this flyer merely serves as a no-binding description of our products and is without guarantee. Binding information in particular relating to capacity data and suitability for specific application can only be provided within the framework of concrete.



HOMMAK®
Machinery Industry and Trade Inc.

+90 232 257 54 44

info@hommak.com www.hommak.com

Balkan Caddesi No:29 Yazlıbaşı / Torbalı - IZMİR



**INNOVATIVE
MANUFACTURING**
Brand